

BJELIN


Nadura Tile



GRADING: Tile

CLASS
34

Rated for Heavy-Duty
Commercial Use

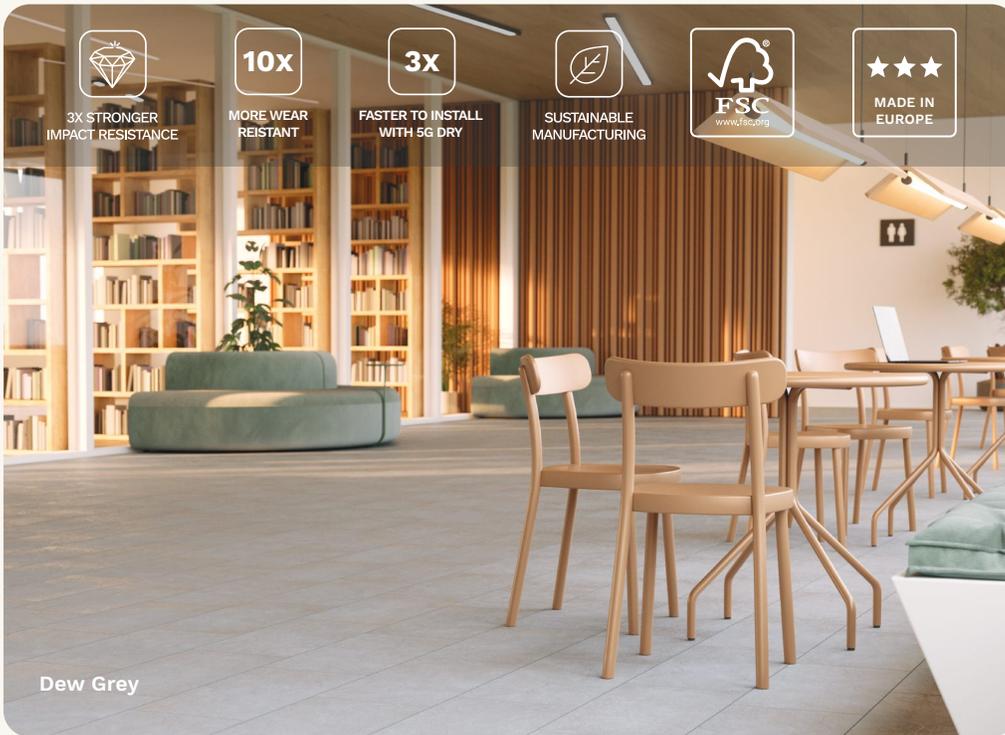

PRODUCT DETAILS

PRODUCT	Nadura Tile
STAINING COLORS	3
DIMENSIONS	11" x 22.9" x 10.5mm
GRADING	Tile
BEVEL	Decorative Groove
CORE	Välinge Compositiek core
VENEER THICKNESS	0.4mm
SURFACE TREATMENT	UV cured acrylic
SURFACE TEXTURE	Soft Slate
TRANSITIONS	Install 82 ft in any direction without transitions

PACKAGING

PLANKS PER PACKAGE	8
AREA PER PACKAGE	13.99 sqft
WEIGHT OF PACKAGE	29.1 lbs



woodura®
PATENTED SURFACE TECHNOLOGY

CLASSIFICATION

	Classification	Result
SMOKE DENSITY	ASTM E662	Passes
CRITICAL RADIANT FLUX	ASTM E648	Class 1
THERMAL CONDUCTIVITY	ASTM C518	1.2472 Vlu in/h ft2 F
FORMALDEHYDE	ASTM D6007	Passes
SLIP RESISTANCE	A137.1/A326.3	Wet: 0.73
THERMAL RESISTANCE	EN 12667	0.075 (m ² x K)/W
BRINELL HARDNESS	EN 1534	8 HB (mv)
IMPACT RESISTANCE	EN 14354	EC3
THICKNESS SWELLING	EN 14354	<10%
WEAR RESISTANCE	EN 14354	>6000 cycles*
SLIP RESISTANCE	EN 14342:2013	EU: With slider 55: 66 GB: With slider 96: 62

STEP SOUND REDUCTION WHEN USING 2MM UNDERLAY FOAM	EN ISO 10140-3 EN ISO 717-2	18-20 dB
--	--------------------------------	----------

*When tested on a flat surface

LEED SCORE

LEED V4 EQ CREDIT: LOW-EMITTING MATERIALS	1 Point
LEED V4 MR CREDIT: ENVIRONMENTALLY PREFERABLE PRODUCTS	1 Point
LEED V4 MR CREDIT: RESPONSIBLE SOURCING OF RAW MATERIALS	1 Point
LEED V4 MR CREDIT: ENVIRONMENTAL PRODUCT DECLARATIONS	1 Point



800.492.8722
UrbanSurfaces.com