

The logo for Urban Surfaces, featuring the word "URBAN" in a bold, sans-serif font above the word "SURFACES" in a smaller, similar font. The text is white and set against a dark background.

URBAN
SURFACES

MAIN | STREET

8 MIL LVP GLUEDOWN FLOORING

A white square containing the number "8" in a large, bold, sans-serif font, with the word "MIL" in a smaller, bold, sans-serif font below it.

8
MIL



Midland Grey
8050



Marquette
8061



Aspen
8070



Hudson
8071



Briscoe
8123




Ash
8307



Urban Surfaces' Signature Collection features our most sought-after flooring designs, carefully selected from across our diverse lines. Choosing from the Signature Collection means investing in flooring that has proven its timeless appeal—not only through unmatched durability but also enduring style.

A CUT ABOVE AND WITHIN BUDGET

The solution for those looking for the look and feel of real wood floors at a fraction of the cost. Built for the budget conscious, the Main Street line delivers on value with 6 beautiful colors.

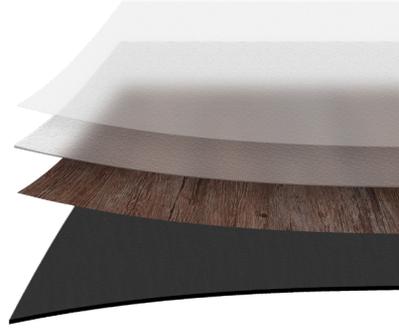

Exactly What Your Project Needs



TRUE TO ITS NAME

Everlast is here to stay with its heavy-duty, hard-set bond that handles both light-traffic and commercial applications with heavy rolling loads.

- Everlast Hard-Set Adhesive provides immediate post-install access for light traffic so spaces stay occupied.



TRILOGY LETS YOU DECIDE

Trilogy primes for an effective adhesive bond, setting the stage for Everlast to effectively and securely bond GlueDown LVP to the subfloor.

- Provides encapsulation or up to 95% moisture protection (not simultaneously).

NATURAL ELEGANCE FOR ANY RESIDENCE

MAIN|STREET
8MIL LVP GUELDOWN FLOORING

Specifications

Product Type	Luxury Vinyl Plank (LVP)
Core Material	2mm Virgin Vinyl
Fiberglass Reinforced	FiberBlend
Wear Layer	8mil ScratchGuard
Embossing	Natural Wood Texture
Edge Profile	Square Edge
Overall Thickness	2mm (0.079")
Nominal Plank Size	7" x 48"
Actual Plank Size	177.8mm x 1219.2mm
Surface Protection	Enhanced Polyurethane System

GlueDown Floor

Testing

Slip Resistance ASTM D2047	>0.6 (Dry)
Static Loading ASTM F970	2,000 PSI .005"
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3 Low-Emitting Materials	1 Point

Warranty

Residential	15 Years
Light Commercial	5 Years



FOR MORE
MAIN STREET
IMAGES AND INFO

800.492.8722
Sales@UrbanSurfaces.com
Designed and Developed in the USA