



MAIN STREET LUXURY VINYL COLLECTION

URBAN
SURFACES

8

mil

Delivering Lasting
Value To The Home.

MAIN|STREET
RESIDENTIAL LVP

**8MIL SCRATCHGUARD
WEAR LAYER**

Effective Wear Protection


**NATURAL WOOD
TEXTURE**

Ultra-Realistic Look
Focused Color Selection



View
Products

Aspen 8070

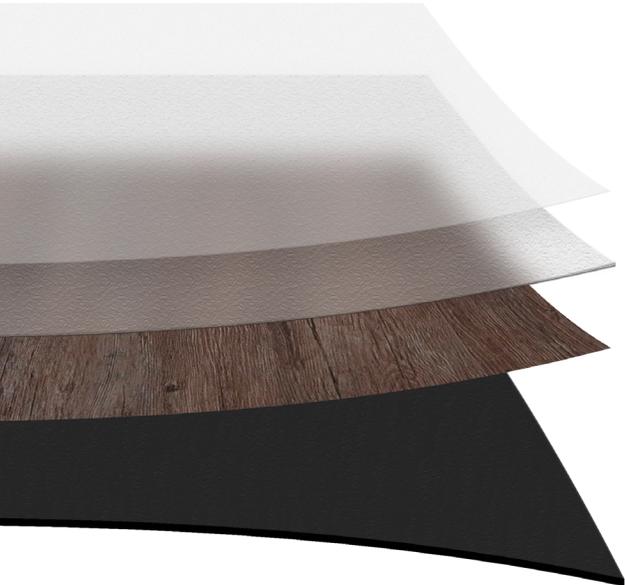

**ENHANCED
POLYURETHANE SYSTEM**

- Highly Stain Resistant

2MM PURE VINYL

- Chip and Dent Resistant
- 100% Waterproof

**8MIL SCRATCHGUARD
WEAR LAYER**

- Effective Wear Protection

NATURAL WOOD TEXTURE

- Ultra Realistic Look
- Focused Color Selection



**100%
WATERPROOF**



DURABLE



**EASY TO
CLEAN**



**EASY
REPAIR**

WARRANTIES


Residential _____ 15 Years
Light Commercial _____ 5 Years

Guaranteed Phthalate Free

Core _____ Pure Vinyl
Plank Size _____ 7" x 48"
Thickness _____ 2mm
Wear Layer _____ 8mil ScratchGuard
Edge Profile _____ Square
Installation _____ GlueDown
LEED Scorecard _____ EQ 4.3 - 1 Point

Briscoe - 8123

Briscoe's light tones never overpower a room, making it easy to blend with most furnishings.

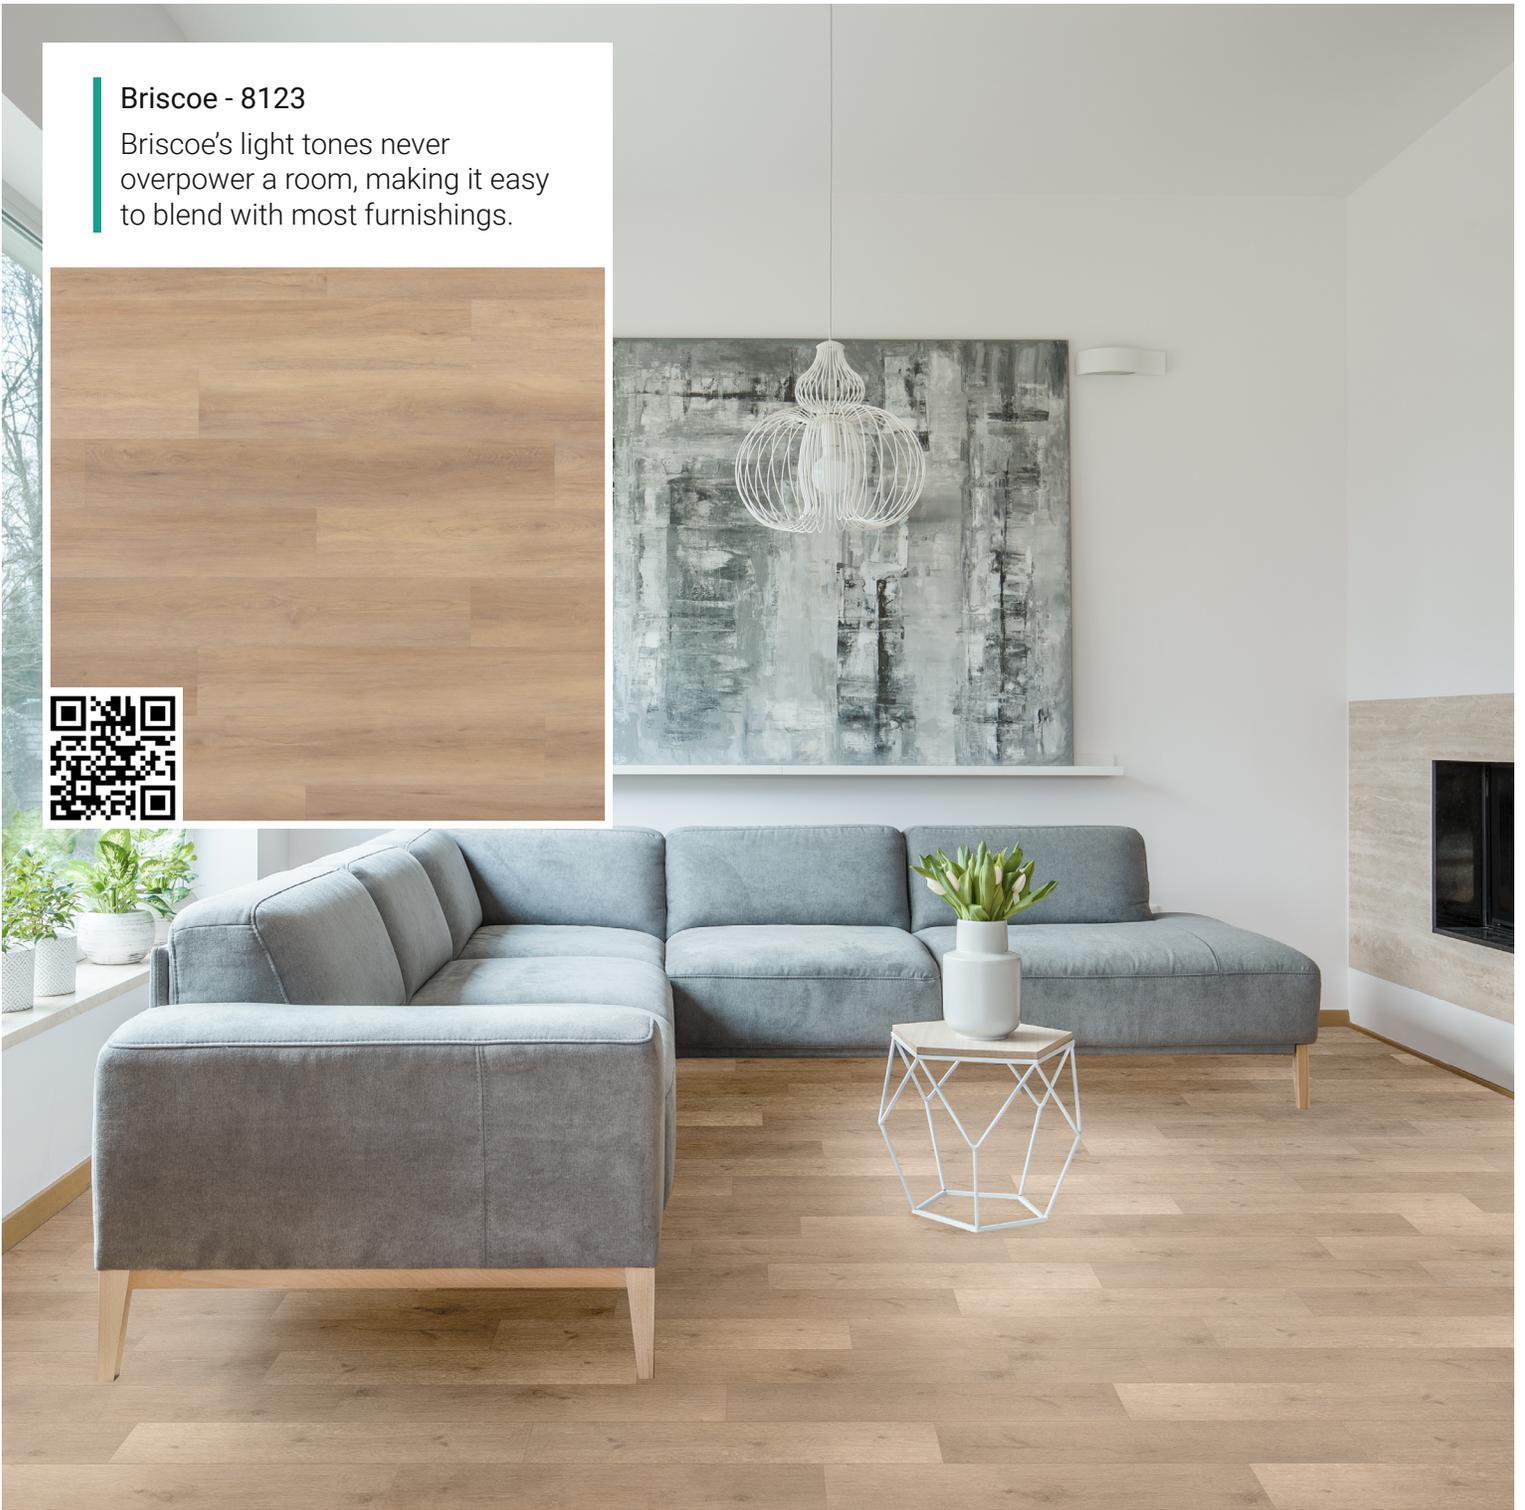




Hudson - 8071

This rustic floor offers a natural-looking grain pattern with a warm feeling.



Aspen - 8070

Aspen captures the beauty of the quaking Aspen trees of North America.

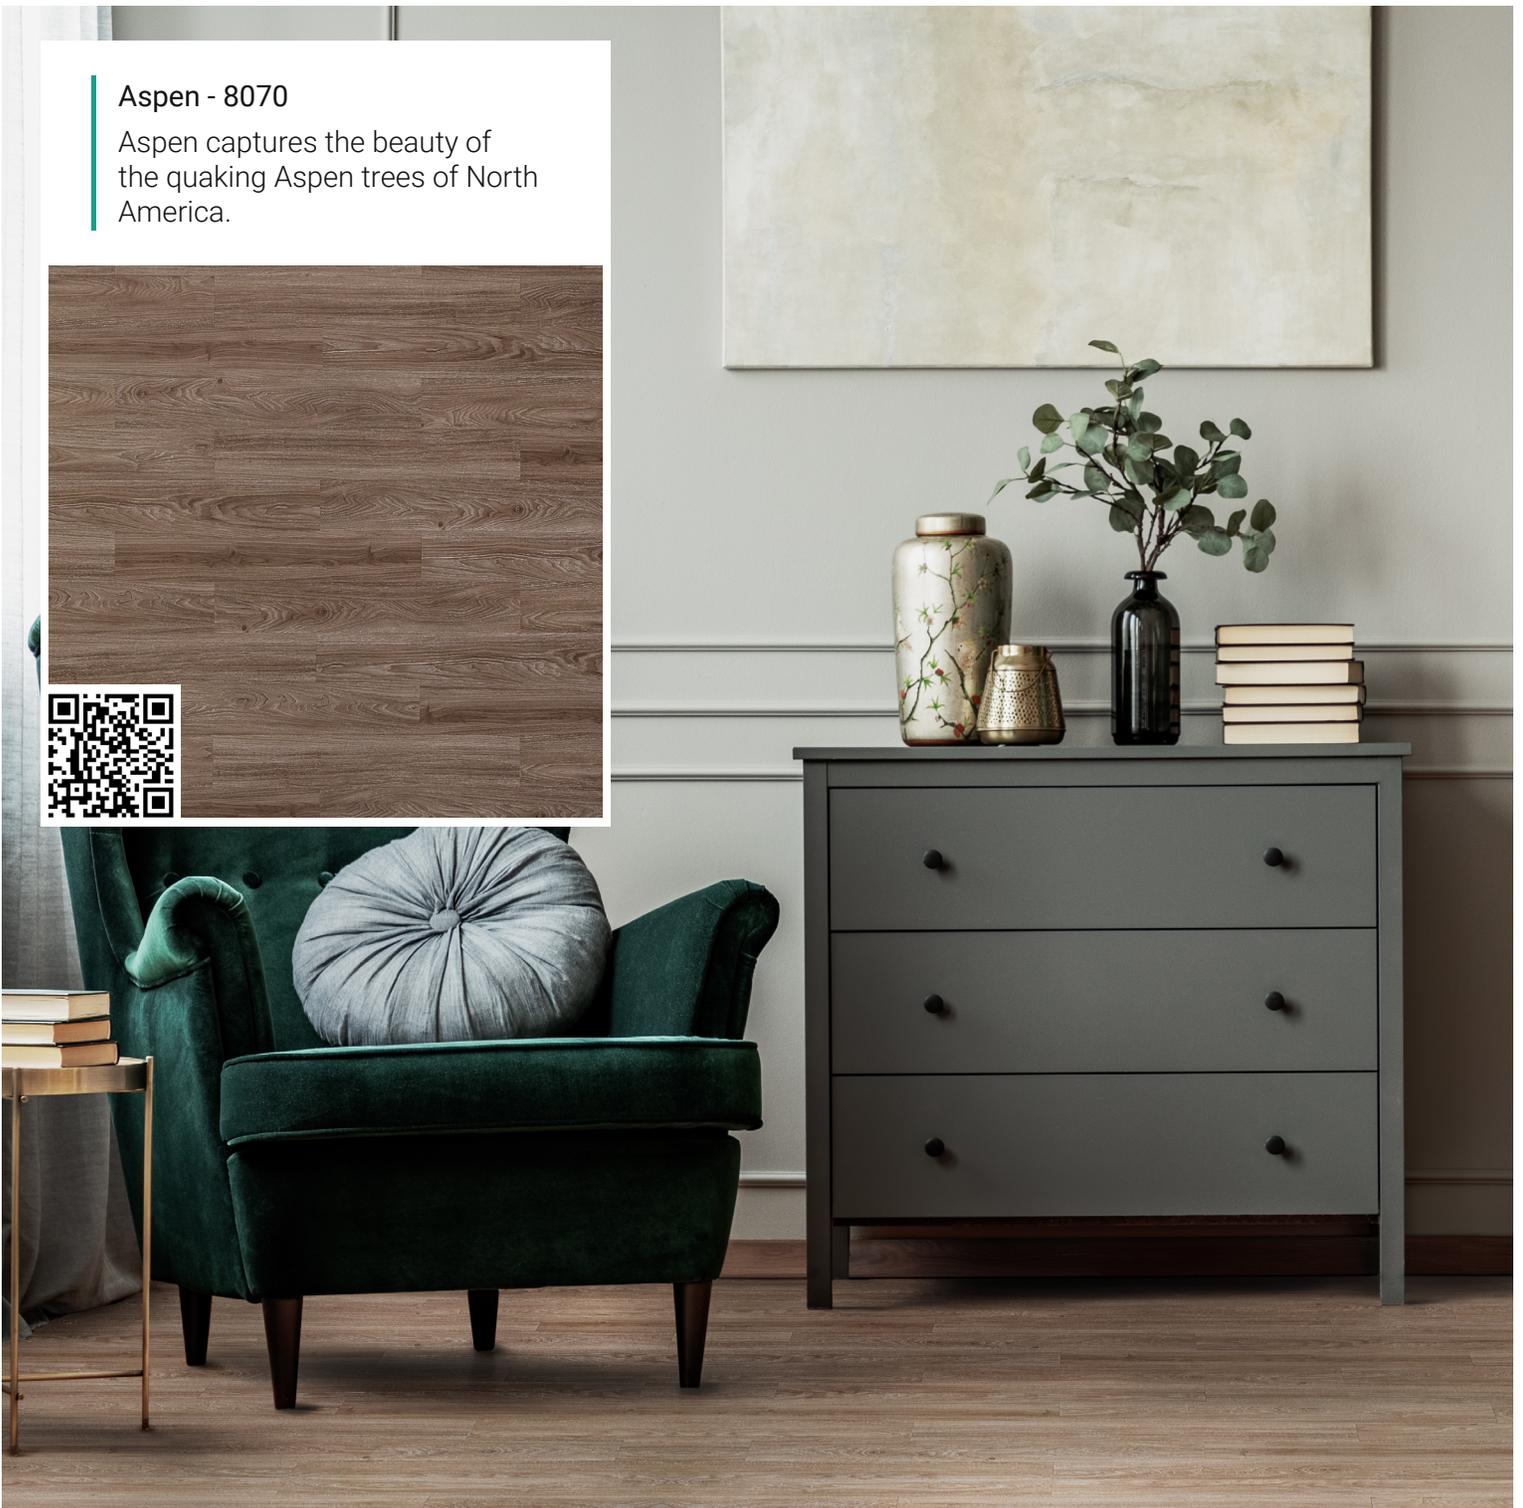



Aspen - 8070

Marquette - 8061

So versatile, Marquette blends nicely in the home, office or any high-traffic area.



The image displays a close-up, top-down view of a wood-grain texture. The color is a muted, greyish-brown, often referred to as 'Midland Grey'. The grain pattern is highly detailed, showing various wood grain types such as straight grain, wavy grain, and prominent knots. The texture is three-dimensional, with subtle ridges and valleys that catch the light, giving it a tactile appearance. The overall effect is a sophisticated and natural-looking material finish.

Midland Grey - 8050

Midland Grey - 8050

Midland Grey catches the eye with tones of brown and grey. The use of these colors brings this look to life.



Also available in Sound-Tec 9525

Ash - 8307

Named for its smoky undertones, this look combines a brownish amber with grey undertones.



Also available in Sound-Tec 9507, Level Seven 7070



Ash - 7070


Also Available in Main Street 8307, Sound-Tec 9507

CREATE INSPIRING SPACES.


Add personality and style by combining different colors or mix installation pattern types.




GlueDown flooring can be installed in many different variations and combinations. When designing your project, add personality and style by combining different colors or mix installation pattern types. Your floor is what you make it with Urban Surfaces' Luxury Vinyl Plank.




Random Pattern




45° Random




Subway Pattern



Single Herringbone



Square Herringbone



Double Herringbone



GREAT FLOORS NEED GREAT ADHESIVE.

Antimicrobial technology, Plasticizer migration resistance, Color ready technology in every bucket.



Urban-3020

Coverage: 150-350 Sqft /gal

Available in 1 & 4 Gal

Shelf life 2 years

Hard-Set, Transitional Pressure Sensitive Adhesive.

- Aggressive tack, fast grab
- High moisture tolerance
- Permanent, waterproof bond
- Ideal for heavy rolling loads
- Immediate access for light traffic
- Installs multiple floor types
- Low VOC, Extremely low odor



Flash time
30-60 MIN



Working time
3 HRS



Cure time
12 HRS



Heavy Traffic
24 HRS



Rolling Loads
48 HRS

RH 99%

PH 5-12

MVER 12lbs

Firm-Set, Modified Transitional Pressure Sensitive Adhesive.

- Aggressive tack, fast grab
- High moisture tolerance
- High-strength, water resistant bond
- Elastomeric bond
- Immediate access for light traffic
- Installs multiple floor types
- Low VOC, Extremely low odor



Flash time
30-60 MIN



Working time
12 HRS



Cure time
12 HRS



Heavy Traffic
24 HRS



Rolling Loads
48 HRS



Urban-3010

Coverage: 90-350 Sqft /gal

Available in 1 & 4 Gal

Shelf life 2 years

BREATHE EASY.

What Are You Breathing?

Research by the RFCI (Resilient Floor Covering Institute) shows that on average a person will spend 90% of their life indoors. Whether it be in your working environment, your home, or sitting in a movie theater, you will spend a majority of your time inside. When this is realized, you may want to know how healthy the air quality is, and rightly so. A recent study done by the Environmental Protection Agency (EPA) found that indoor air was deemed two to five times more harmful than outdoor air. This is due to many harmful pollutants including radon, mold, and carbon dioxide found indoors. Healthy air contributes to better learning in schools, improved productivity in offices, and more comfortable homes. Poor indoor air quality (IAQ Indoor Air Quality) can be a factor in a variety of health problems, such as headaches, dizziness, and more serious long-term effects.

Why LVT/SPC Flooring?

LVT/SPC floors are easy to clean and maintain because they provide a impenetrable surface that doesn't absorb odors, spills, dust, or soil. They also don't retain moisture, which can lead to microorganisms such as dust mites and mold.

FloorScore and LEED Certification

Hard-surface flooring that is certified for low VOC emissions by FloorScore, such as Urban Surfaces' entire flooring selection, can contribute a point toward LEED certification. LEED (or Leadership in Energy and Environmental Design) is a global certification program for green buildings that is meant to promote the construction of buildings that are better for the planet and our health.



by SCS Certified



BUILD RESPONSIBLY.

Why FloorScore?

When it comes to indoor air quality, a primary concern is the emission level of specific volatile organic compounds (VOCs). FloorScore® IAQ Certification means that a flooring product is independently certified by SCS Global Services to comply with the volatile organic compound emissions criteria of the California Section 01350 Program. Hundreds of resilient flooring materials and their adhesives bear the FloorScore® seal. This seal tells you that the products have been independently certified by SCS to comply with the volatile organic compound emissions criteria of the California Section 01350 standard. Any product that has met these stringent standards is a product that will contribute to good IAQ.

FloorScore Requirements?

To earn the FloorScore® seal, a flooring product must satisfy the requirements of the SCS-EC-10.2-2007 Environmental Certification Program – Indoor Air Quality Performance.

Which Includes:

- Testing demonstrating compliance with emission concentrations for listed VOCs under California Section 01350
- Manufacturing facility on-site audits and yearly surveillance audits
- Annual product re-testing
- Product record keeping
- A documented quality control plan





DELIVERING LASTING VALUE TO THE HOME.

US2304

URBAN SURFACES
800.492.8722
Sales@urbansurfaces.com
Designed and Developed in California

